

Certificate of Constancy of Performance



Certificate n°: 0757-CPR-277-6080181-6-4

In compliance with Regulation (EU) No 305/2011 of the European Parliament and of the Council of 9 March 2011 (the Construction products Regulation or CPR), this certificate applies to the construction product

Basis:

EN 16034
EN 14351-1

External door as per EN 14351-1:2006+ A2:2016 with fire resistance and/or smoke control as per EN 16034:2014

Trade name

Product range "H120 OD"
with trade name
"H120-1 OD" and "H120-2 OD"

Product description/
specification

Steel, hinged, single and double leaf doors corresponding to EN 14351-1. Construction and classification: see EXAP-reports no. 01653.2/24/R171NZZ dated 27.06.2024 and 01653/24/R171NZZ dated 27.06.2024 as well as classification reports no. 01653.1/24/R171NZZ dated 27.06.2024 and 01653.3/24/R171NZZ dated 27.06.2024

Levels and classes of
performance

According to configuration in **annex 1**

Intended use(s)

- Installation in residential and non-residential construction
- In the case of room partitioning into fire and/or smoke protection sections and/or escape routes

placed on the market
under the name or trade
mark of

Hörmann KG Verkaufsgesellschaft
Upheider Weg 94-98, DE-33803 Steinhagen

and produced in the
manufacturing plant(s)

Hörmann KG Freisen
Bahnhofstraße 43, D-66629 Freisen

Notified body No.

0757


This certificate attests that all provisions concerning the assessment and verification of constancy of performance described in Annex ZA of the standard(s)

EN 14351-1:2006+A2:2016 and **EN 16034:2014**


under system 1 for the performance set out in this certificate are applied and that the factory production control conducted by the manufacturer is assessed to ensure the **constancy of performance of the construction product**.

This certificate was first issued on 09.06.2021 and will remain valid until 08.06.2027, as long as neither the harmonised standard, the construction product, the AVCP methods nor the manufacturing conditions in the plant are modified significantly, unless suspended or withdrawn by the notified product certification body.

The use of this certificate and the marking of the products are bound by an existing certification and surveillance contract with the **ift** Rosenheim no. 277 6080181.

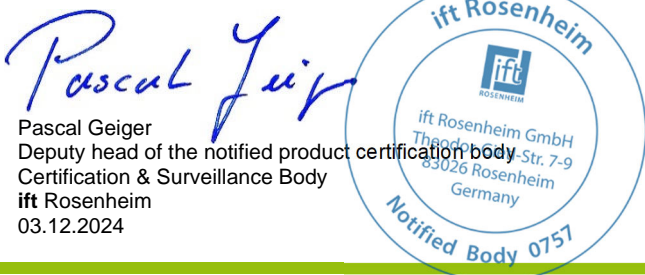

Pascal Geiger
Deputy head of the notified product certification body
Certification & Surveillance Body
ift Rosenheim
03.12.2024



www.ec.europa.eu

Identity check



www.ift-rosenheim.de/
ift-zertifiziert
ID: D66-E15D3

Certificate of constancy of performance

Annex 1 Page 1 of 1
Certificate holder: Hörmann KG Verkaufsgesellschaft
Date of issue: 03.12.2024



Certificate n°: 0757-CPR-277-6080181-6-4

Product description:

| Essential characteristics according to EN 16034 | Performance |
|--|--|
| Fire resistance (in the case of room partitioning into fire and/or smoke protection sections) | NPD / E 15 / E 20 / E 30 / E 45 / E 60 / E 90 / E 120 NPD / EW 15 / EW 20 / EW 30 / EW 45 / EW 60 / EW 90 / EW 120 NPD / EI ₂ 15 / EI ₂ 20 / EI ₂ 30 / EI ₂ 45 / EI ₂ 60 / EI ₂ 90 / EI ₂ 120 NPD / EI ₁ 15 / EI ₁ 20 / EI ₁ 30 |
| Smoke control (only for applications where smoke spread limitation is required) | NPD / S _a / S ₂₀₀ |
| Ability to release | NPD / Released |
| Self-closing action (only for self-closing fire and/or smoke protection doors and/or windows) | NPD / C |
| Durability of ability to release | NPD |
| Durability of self-closing (only for self-closing fire and/or smoke protection doors and/or windows) – Compared with loss of quality (resistance to repeated opening and closing) – Compared with ageing (corrosion) | NPD / 0 / 1 / 2 / 3 / 4 / 5 NPD |