

Certificate of Constancy of Performance



Certificate n°: 0757-CPR-277-6080181-1-4

In compliance with Regulation (EU) No 305/2011 of the European Parliament and of the Council of 9 March 2011 (the Construction products Regulation or CPR), this certificate applies to the construction product

Basis:

EN 16034
EN 14351-1

**External door as per EN 14351-1:2006+
A2:2016 with fire resistance and/or
smoke control as per EN 16034:2014**

**Product range "H3 OD"
with trade name
"H3-1 OD" and "H3-2 OD"**

Trade name

Product description/
specification

Single and double leaf steel sheet-side hinged door corresponding to EN 14351-1. Construction and classification see EXAP-report no.: 15-001366-PR01 and classification report no.: 15-001366-PR02.

Levels and classes of
performance

According to configuration in **annex 1**

Intended use(s)

- Installation in residential and non-residential construction
- In the case of room partitioning into fire and/or smoke protection sections and/or escape routes

placed on the market
under the name or trade
mark of

Hörmann KG Verkaufsgesellschaft
Upheider Weg 94-98, DE-33803 Steinhagen

and produced in the
manufacturing plant(s)

Hörmann KG Freisen
Bahnhofstraße 43, DE-66629 Freisen

Notified body No.

0757


This certificate attests that all provisions concerning the assessment and verification of constancy of performance described in Annex ZA of the standard(s)

EN 14351-1:2006+A2:2016 and EN 16034:2014


under system 1 for the performance set out in this certificate are applied and that the factory production control conducted by the manufacturer is assessed to ensure the **constancy of performance of the construction product.**

This certificate was first issued on 29.08.2017 and will remain valid until 28.08.2026, as long as neither the harmonised standard, the construction product, the AVCP methods nor the manufacturing conditions in the plant are modified significantly, unless suspended or withdrawn by the notified product certification body.

The use of this certificate and the marking of the products are bound by an existing certification and surveillance contract with the **ift** Rosenheim no. 277 6080181.

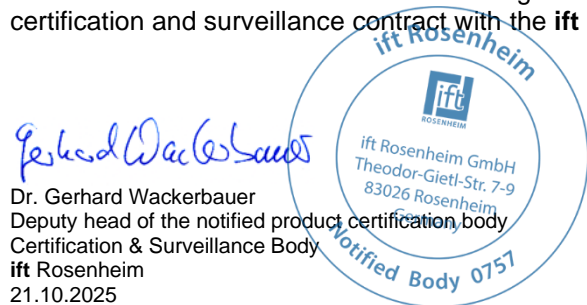

Dr. Gerhard Wackerbauer
Deputy head of the notified product certification body
Certification & Surveillance Body
ift Rosenheim
21.10.2025



www.ec.europa.eu

Identity check



www.ift-rosenheim.de/
ift-zertifiziert
ID: 678-5D60B

Certificate of constancy of performance

Annex 1 Page 1 of 1
Certificate holder: Hörmann KG
Date of issue: 21.10.2025



Certificate n°: 0757-CPR-277-6080181-1-4

Product description:

Essential characteristics according to EN 16034	Performance
Fire resistance (in the case of room partitioning into fire and/or smoke protection sections)	NPD E 15 / E 20 / E 30 EI ₂ 15 / EI ₂ 20 / EI ₂ 30 EW 20 / EW 30
Smoke control (only for applications where smoke spread limitation is required)	NPD S _{a3/4} / S ₂₀₀
Ability to release	NPD released
Self-closing action (only for self-closing fire and/or smoke protection doors and/or windows)	NPD C
Durability of ability to release	NPD / release maintained
Durability of self-closing (only for self-closing fire and/or smoke protection doors and/or windows) – Compared with loss of quality (resistance to repeated opening and closing) – Compared with ageing (corrosion)	– NPD / 5 – NPD / achieved